

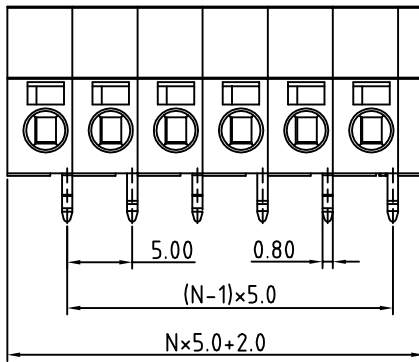


SIGN	DATE	DESCRIPTION	APPROVER
		<i>THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!</i>	

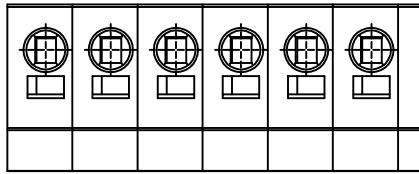

Number of poles

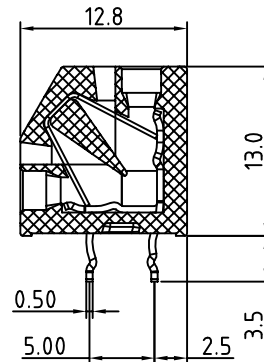

Material

- Insulating body: Thermoplastic (UL94V-0)
- Insulating cover: Thermoplastic (UL94V-0)
- Contact on entry pin: Brass, Tin plated
- Contact on back pin: Brass, Tin plated
- Spring clamp: Stainless steel

Electrical

- Voltage rating: 300VAC
- Current rating: 10A
- Wire range:
 - Solid wire(AWG): 16-20
 - Stranded wire(AWG): 16-20
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -30°C to +105°C
- Soldering temperature: 250°C±10°C/5 Sec


RoHS Compliant

PART NUMBER:

OSTH7XX0080

No. of Poles
02: 2 Poles
:
:
24: 24 Poles

COLOR
0: Black
5: Green
8: Grey (Standard)
C: Multiple Colors

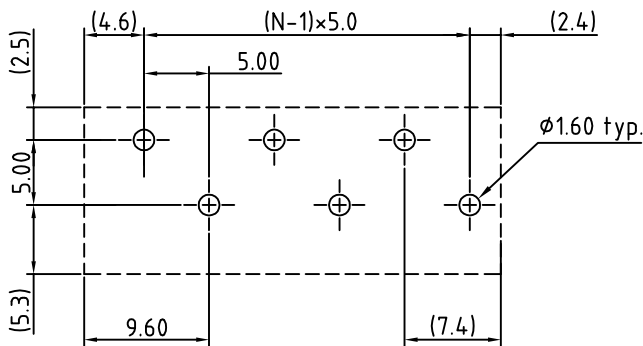

P.C.B. LAYOUT

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		OSTH7 5.0 Series, 2-24p			
PART NO.	OSTH7XX0080	DWG NO.	OSTH7XX0080.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	Tolerance
Shi Jun 2006.11.16	Marvin 2006.11.16	Aaron 2006.11.01	Aaron 2006.11.01		X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*
				UNIT: mm	
				SCALE: NONE	
				SHEET: 01/01	REV.: B